


EasyDial Reg Oxygen Regulator

EasyDial Reg is the top selling oxygen regulator from Precision Medical. The compact unit is only 4.25" long and weighs less than 8 oz. Each regulator model comes standard with a large flow adjustment knob that is knurled making flow adjustment simple for patients. EasyDial Reg is designed for safety with a built-in pressure relief valve, as well as a protected contents gauge. The low force Viton yoke seal provides a superior tank-to-regulator seal and has an innovative design that minimizes normal flow variation that occurs as tank pressure drops.



168715D

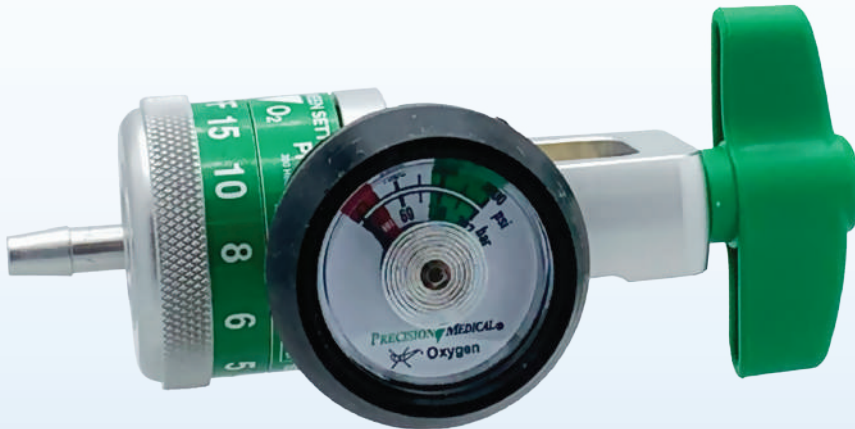

168715D-K

Features

Available in 2 body designs, yoke or nut style

Available in 5 flow ranges:
0-4000 cc/min,
0-4 l/min, 0-8 l/min,
0-15 l/min, and 0-25 l/min

Low force Viton yoke seal provides a better tank-to-regulator seal

Ergonomic T-handle

Lightweight aluminum body and cap

6 color-coded gauge protectors

Contents gauge on the front and the flow gauge on the top

Specifications

Dimensions:
Length: 4.25"
Weight: 7.8 oz

Accuracy:
31 to 125 cc/min ± 10 cc
0.25 to 25 l/min $\pm 10\%$ of indicated flow

Inlet Pressure Range:
300 - 3000 psi
(20.7 - 206.8 bar)

Ignition and Fault Tolerance:
Meets ASTM G175-03

Warranty

5-year on device

Need something else?

Contact Customer Service at 1-800-272-7285 for custom requests and more information.

Ordering Information



Tubing Nipple
168708D shown



DISS Male (DSDS)
168715DSDS shown



90° DISS Male (DSDR)
168715DSDR shown



90° Hose Barb (DSR)
168715DSR shown



No Gauge (NG)
168708DNG shown



Extended (X)
165404DSDSLX shown

Flow Range & Position Increments	CGA Connection	Options					
		Tubing Nipple	DISS Male	90° DISS Male	90° Hose Barb	No Gauge used on tanks with built-in gauges	Extended used with humidifier bottles
0-4000 cc/min Increments: OFF, 31, 62, 125, 250, 500, 750, 1000, 1500, 2000, 3000, and 4000	Yoke Style (870)	168704DCL	168704DSDSCL	168704DSDRCL	168704DSRCL	168704DNGCL	168704DSDSCLX
	Nut Style (540)	165404DCL	165404DSDSCL	165404DSDRCL	165404DSRCL	165404DNGCL	165404DSDSCLX
0-4 l/min Increments: OFF, 1/32, 1/16, 1/8, 1/4, 1/2, 3/4, 1, 1 1/2, 2, 3, and 4	Yoke Style (870)	168704DL	168704DSDSL	168704DSDRL	168704DSRL	168704DNGL	168704DSDSLX
	Nut Style (540)	165404DL	165404DSDSL	165404DSDRL	165404DSRL	165404DNGL	165404DSDSLX
0-8 l/min Increments: OFF, 0.25, 0.50, 1, 1.5, 2, 2.5, 3, 4, 5, 6, and 8	Yoke Style (870)	168708D	168708DSDS	168708DSDR	168708DSR	168708DNG	168708DSDSX
	Nut Style (540)	165408D	165408DSDS	165408DSDR	165408DSR	165408DNG	165408DSDSX
0-15 l/min Increments: OFF, 0.50, 1, 1.5, 2, 3, 4, 5, 6, 8, 10, and 15	Yoke Style (870)	168715D	168715DSDS	168715DSDR	168715DSR	168715DNG	168715DSDSX
	Nut Style (540)	165415D	165415DSDS	165415DSDR	165415DSR	165415DNG	165415DSDSX
0-25 l/min Increments: OFF, 0.25, 0.50, 1, 2, 3, 4, 6, 8, 10, 15, and 25	Yoke Style (870)	168725D	168725DSDS	168725DSDR	168725DSR	168725DNG	168725DSDSX
	Nut Style (540)	165425D	165425DSDS	165425DSDR	165425DSR	165425DNG	165425DSDSX
Gauge Guard Color Options All regulator models come with the standard green gauge guard. To order a different color gauge guard, add the suffix to the end of the part numbers above.		-Y (Yellow)	-R (Red)	-B (Blue)	-P (Purple)	-K (Black)	